


3 Channel Weight Indicator: SMIT-1301

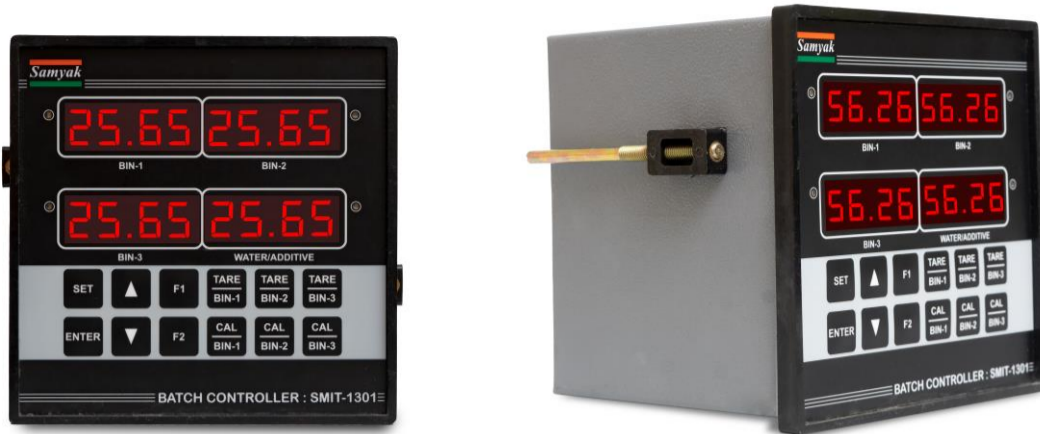

MAINS FEATURES OF THE UNIT:

- Micro controller based unit
- It has 64 KB EEPROM for data & parameter storage
- Operating Supply: 110-230VAC
- Keyboard: Eight keys membrane like Keypad
- Display: 4 digit LED (for each channel)
- Input: Load cell Sensor (Up to Four channel)
 - Excitation Voltage: 10VDC
- Number of components: Up to 4 (first channel)
- Discharge sequence Programmable
- Onboard RTC
- Field Programmable parameters:
 - Set points for four components
 - Offset for four components
 - Minimum weight to start new batch
 - Gate Time: delay time between feeding of the four components
 - Dead Weight: Minimum to start a new batch
 - Control Outputs: Total 4 relay outputs:
 - Four relays to control Feeding of components
 - Digital Inputs: 2 digital inputs (One for water metering & one for remote command)
 - Calibration: Offset & Span calibration through software using keypad
 - Serial Interface: RS-232/RS-485 (for Printer/Computer/HMI/Pen drive module)
- **Mechanical Data:** Mounting: Panel mounting
 - Cutout size: 138 mm x 138 mm
 - Outerdimension: 144mm(W)x144mm(H)x125mm (Depth)
 - Enclosure: Metallic, Powder coated, General Purpose

Samyak Instrumentation Pvt. Ltd.

F/4, Memnagar Complex, Opp. Petrol Pump, Memnagar, Ahmedabad-380 052, India

Phone: 91-79-27495500/5600 Fax: +91-79-27417997

E-mail: sales@samyak.com url: www.samyak.co.in