


PROCESS INDICATOR CONTROLLER: Model: SMIT- 3015

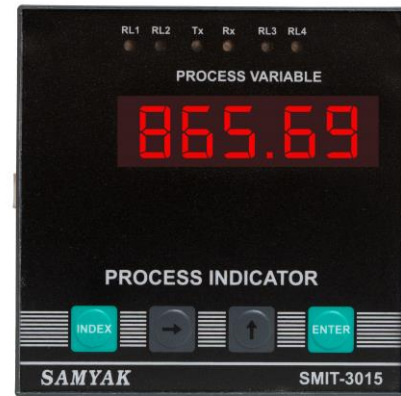

FEATURES:

- MICROCONTROLLER BASED
- Accepts Analog Input: 4.0-20.0mA, 0-20 ma, 0-5 V, 1-5 V
- Number of Inputs Channels: Up to 4
- Four Keys membrane Like Keypad
- 5-Digit Numeric 0.56" Red LED display for Process Variable
- Operating at 100-263VAC
- Transmitter Power supply: +24VDC/50mA
- Programmable parameters: Zero, Full scale, Decimal position
- Non-volatile Memory for storing configuration parameters
- Calibration thro' software
- Options:
 - Retransmission: 4.0-20.0mA Isolated (Linear Proportional to Indication)
 - Four Relays (5A/230VAC) for Alarm
 - Communication: RS232 or RS-485 (2-wire), MODBUS protocol
- **Mechanical Data:** Mounting: Panel mounting
 - Cutout size: 92 mm x 92 mm
 - Outer dimension: 96 mm x 96 mm x 120 mm (Depth)
- Enclosure: Normal

Samyak Instrumentation Pvt. Ltd.

F/4, Memnagar Complex, Opp. Petrol Pump, Memnagar, Ahmedabad-380 052, India

Phone: 91-79-27495500/5600 Fax: +91-79-27417997

E-mail: sales@samyak.com url: www.samyak.co.in