


## RS232/RS485 to RS485/RS232 CONVERTER

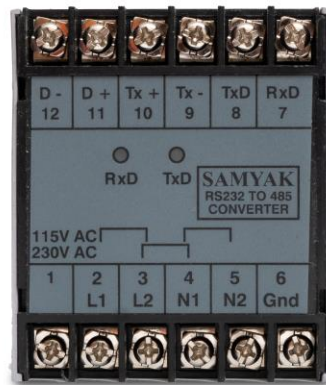

### **Specifications:**

This is DIN rail mounting type RS-485/422 to RS232 converter.

- Power Supply: 110/230VAC, 50 Hz or +5VDC
- RS-232 interface: 3-wire
- RS-485 interface: 2-wire or 4-wire
- Galvanic Isolation of 1KV between RS-232 and RS-485/422 signals
- Supports high speed communication
- Supports 32 nodes on RS-485 side
- Enclosure: DIN rail mounting
- Dimension:
  - Outer: 70 mm (W) x 60 mm (H) x 111 mm (D)

It is recommended to use twisted shielded pair of cable for connecting on RS485 side

This device is very useful for inter connecting field instruments, PLC, PC, HMI etc.

---

### **Samyak Instrumentation Pvt. Ltd.**

F/4, Memnagar Complex, Opp. Petrol Pump, Memnagar, Ahmedabad-380 052, India

**Phone:** 91-79-27495500/5600 **Fax:** +91-79-27417997

E-mail: [sales@samyak.com](mailto:sales@samyak.com) url: [www.samyak.co.in](http://www.samyak.co.in)

---